



Z-6082

Compact Dual-Laser Omnidirectional Vertical Scanner

Standard Device

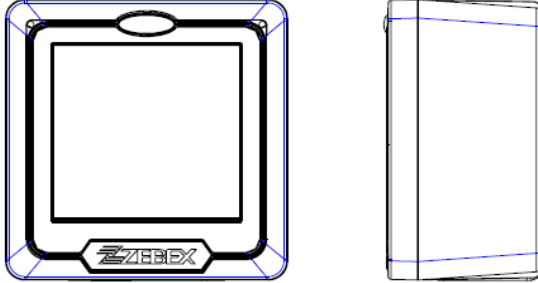

Auxiliary Port RS-232 IN Only	
Pin	Function
1	NC
2	NC
3	+5V output, 150mA max.
4	RTS_Out
5	Ground
6	TXD_Out
7	RXD_In
8	NC
9	CTS_In
10	NC



Host Port (RS-232/Keyboard Wedge)		
Pin	Host Function	
	Keyboard Wedge	RS-232C
1	DC +5V Input	
2	Keyboard Clock	N.C.
3	PC Clock	RTS_CMOS
4	Ground	
5	N.C.	TXD_CMOS
6	N.C.	RXD_CMOS
7	Keyboard Data	N.C.
8	PC Data	CTS_CMOS

Model No.	Part No.	Barcode Symbology	Remark
Z-6082	886-820000-001		RS-232C/CMOS Keyboard Wedge, USB

Standard Cable Options

1. Keyboard Wedge Cable (for PS/2)

	PIN-OUT CONFIGURATION			
	P1- MINI DIN (M)		P2-MINI DIN (F)	
Din	Function	Din	Function	
1	PC Data	1	KB Data	
2	N.C.	2	N.C.	
3	GND	3	GND	
4	+5V	4	+5V	
5	PC Clock	5	KB Clock	
6	N.C.	6	N.C.	

Item Part No. 171-41K105-200

2. RS-232C Cable

DTE Pin-Out

DB-9 (F)	FUNCTION
2	TX
3	RX
7	CTS
8	RTS
5	GND

Item Part No. 171-41R425-200

DCE Pin-Out

DB-9 (F)	FUNCTION
2	RX
3	TX
7	RTS
8	CTS
5	GND

Item Part No. 171-41R415-200

3. USB Cable

USB TYPE A CONNECTOR	FUNCTION
1	VCC
2	D-
3	D+
4	VSS


Item Part No. 171-41U305-200

Note:

- DTE: Data Terminal Equipment
- DCE: Data Communication Equipment
- Special order requirement:
ZEBEX is capable of supplying special cable that is not listed in this guide, given that customers provide detailed pin configurations.
- Length of the cable is 2 meters.

Optional Accessories

Power Adapter



Part No.	Barcode Symbology	Plug	Output	Applicable Regions
11S-500050-001		UK Plug	5 VDC 1mA	United Kingdom, Scotland
11S-500051-001		US Plug	5VDC 1mA	North America, Japan, Taiwan
11S-500052-001		Australia Plug	5VDC 1mA	Australia
11S-500053-001		European Plug	5VDC 1mA	Europe, China, South East Asia, Middle East, South America